

## STUDY OF POWER CONSUMPTION IN PNEUMATIC COTTON CONVEYING SYSTEM

Shukrullo Nematjonov- Independent Researcher, Abdul-Malik Kayumov –  
DSc, professor, Olimjon Sarimsakov - DSc, professor  
(E-mail: [olimjon5008@mail.ru](mailto:olimjon5008@mail.ru))

Namangan Institute of Engineering and Technology, Namangan, Uzbekistan

**Abstract.** Reducing energy consumption during pneumatic conveying cotton is a topical issue at the ginning plants. In this paper we consider the possibility of reducing energy costs by using smaller diameter pipes. It proposed a mathematical model and presents the analysis of energy consumption on parameters of the pneumatic conveyor and flow. Studies have established that the power spent on transporting the medium largely depends on the average flow rate, and then on the parameters (resistance of the inner surface, length and diameter) of the pipeline, and a significant part of the power is spent on air transportation. At the same time, the use of smaller diameter pipes at moderate flow rates reduces energy consumption and, consequently, reduces production costs at cotton gins.

Keywords: pneumatic installation, static pressure, dynamic pressure, aerodynamic force, power consumption, raw cotton.

### 1. Changing the air pressure in the pneumatic transport pipeline

In the known theories on the pneumatic transport wind power is considered as a function of the square of the speed or airflow [1], [2]. This means that it depends only on the dynamic pressure which, when a complete seal and the pipeline system element is constant, not varying along the length of the tube. However, experience shows that the magnitude of the aerodynamic force is not constant, but varies depending on the length of the tube - a maximum value of the fan and towards the beginning of the pipeline is gradually reduced, just as static pressure [3] [4] [5]. Based on these considerations, we have the task of establishing the influence of the static pressure on the value of wind power.

The total pressure consists of  $P_p$  2 terms,  $P_d$  is the dynamic pressure and static  $P_{st}$ :

$$P_p = P_d + P_{st}, \quad (1)$$

The dynamic pressure  $P_d$  is, the kinematic energy of the flow, and depends only on its parameters - medium density  $\rho$  and speed  $v$ :

$$P_d = 0,5\rho v^2$$

Static pressure is the potential energy of the medium position. it is mathematically well described for a fixed environment, but for a moving medium is difficult to describe. Our studies show that we have proposed semi-empirical laws describing the change in the static pressure on the transportation lines are well supported with experimental data [6]:

$$P_{cm} = P_H - Pu = P_H - 0.5 \rho v^2 \lambda L/d, \quad (2)$$

Here,  $Pu = 0.5 \rho v^2 \lambda L/d$  - static pressure it takes to preodaleniya friction force of the medium on the inner wall of the pipeline, Pa;  $P_H$  - rated pressure developed by the fan during normal operation, Pa;  $\rho$  - density of the fluid  $\text{kg} / \text{m}^3$ ;  $v$  - of the medium speed, m/s;  $\lambda$ - drag coefficient, L- length, d - diameter of the pipeline, m.

According to (1) the force applied to overcome the frictional force must be directed against it and the direction of motion of the medium. Based on this, change the sign between the terms in the (+) in the equation (2):

$$P_{st} = P_H + 0.5 \rho v^2 \lambda L/d, \quad (3)$$

The total pressure is defined as  $P = P_{st} + P_d$ . with this in mind (2) comes after some transformation to the form:

$$P = P_H + 0.5 \rho v^2 (\lambda L/d + 1), \quad (4)$$

## 2. The aerodynamic force and power consumption for pneumatic transport

Move medium in the pipeline produces aerodynamic force  $F_a$  and the force of friction  $F_u$  seeks to stop the move. A motion to osushestvlyatsya, as indicated above, should be accompanied by a force equal to  $F_u$  but against its direction [7]. Moreover, the aerodynamic force  $F_a$  produce dynamic and static pressure and friction force  $F_u$  - static. The resulting force  $F$ , sposobstvuyushaya movement of the medium is the product of the total pressure and the cross-sectional area of the pipeline:

$$F = P \cdot f = 0.25 \pi d^2 \cdot (P_H + 0.5 \rho v^2 (\lambda L/d + 1)), \quad (5)$$

If you pay attention to the last equation force  $F$  uvelichyvaetsya with increasing length L and the drag coefficient decreases with increasing diameter of the pipeline and it is logical, because the greater the transport distance, the more energy it will take. If this power depended on the dynamic pressure, the tightness of the system at full strength would be constant over the entire length of the pipeline [8]. However, according to (4) the value of the aerodynamic force is not constant. After simple transformations, we finally obtain:

$$F = 0.125 \pi d^2 \cdot (\rho v^2 (1 + \lambda L/d) + 2P_{ch}), \quad (6)$$

This force does the work of A, equal When the system operation:

$$A = F \cdot L.$$

Through the work done within the time device power consumption is as follows:

$$N = A / t = F \cdot L / t .$$

The ratio of the distance on time is t

the average flow rate:

$$v_p = L / t .$$

In view of the latter, we obtain the dependence of the power expended in moving the environment from the set parameters and flow:

$$N = 0.125 \pi d^2 \cdot (\rho v^2 (1 + \lambda L/d) + 2P_{ch}) \cdot v_p, (7).$$

This formula shows that the power expended in transporting the medium depends largely on the average flow rate, then the parameters from the (inner surface resistance, length and diameter) of the pipeline.

### 3. Power consumption in pneumatic conveying

Let us analyze the dependence [9]. Here, d indicator not only of the pipeline, and the index of the medium, too, because it determines the size of the cross-flow and is equal to the inner diameter of the pipe: d = 0.315; 0.355; 0.4 m. The air density  $\rho = 1,2 \text{ kg / m}^3$ , fuel mixture  $\rho = 1.65 \text{ kg / m}^3$ .

The length of the pipeline will take equal to L = 100 m.

$\lambda$  - friction coefficient of the medium on the inner surface of the pipeline is [7], [8]:

- When air flows:

$$d = 0.315 \text{ m} - \lambda = 0.068;$$

$$d = 0.355 \text{ m} - \lambda = 0.066 ;$$

$$d = 0.4 \text{ m} - \lambda = 0.064.$$

-With Movement aeromixture:


$$d = 0.315 \text{ m} - \lambda = 0.134;$$

$$d = 0.355 \text{ m} - \lambda = 0.133 ;$$

$$d = 0.4 \text{ m} - \lambda = 0.132.$$

(Accepted as the average value of clean air friction coefficients ( $\lambda = 0.064$ - $0.068$ ), and cotton ( $\lambda = 0.2$ ) of the inner surface of the steel pipe).

The analysis is performed on a computer with standard programs, the results of which are presented in graph form in Figure 1, which show that they correctly describe the process: with increasing the flow rate of power consumption increases significantly [10].

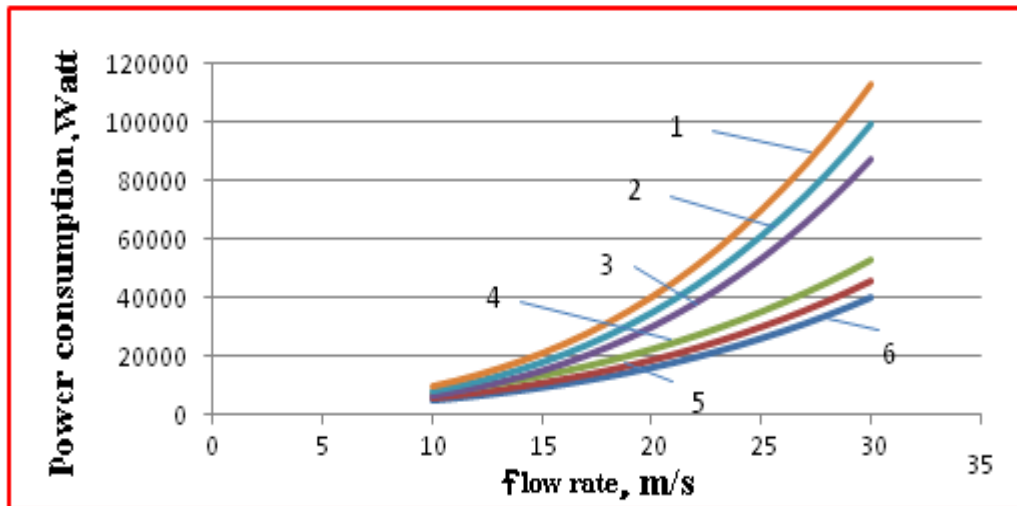

**Fig.1. power consumption depending on the type, flow rate, and pipeline parameters. In graphs: 1-  $d = 0.315\text{m}$ ,  $\rho = 1.2 \text{ kg / m}^3$ ; 2 -  $d = 0.355\text{m}$ ,  $\rho = 1.2 \text{ kg / m}^3$ ; 3 -  $d = 0.4\text{m}$ ,  $\rho = 1.2 \text{ kg / m}^3$ ; 4 -  $d = 0.315\text{m}$ ,  $\rho = 1,65 \text{ kg / m}^3$ ; 5-  $d = 0.355\text{m}$ ,  $\rho = 1,65 \text{ kg / m}^3$ ; 6 -  $d = 0.4\text{m}$ ,  $\rho = 1,65 \text{ kg / m}^3$ . Thus: 1.2 and 3 - with air movement of 4.5 and 6 - fuel mixture during the motion.**


The graphs show that a significant portion of the power consumed for air transportation. Thus, when pipe diameter 0.315 m, a flow rate of 20 m / s is required to move the medium 16 kW of power, and when the raw cotton in the medium increases to the power consumption of 25 kW. Thus, 64% of the power consumed for air transportation [11].

At a speed of 30 m / s is required to move the air 40 kW, and the mixture of air and raw cotton 85 kW, or 48% corresponds to the air flow. With a diameter of 0.4 m, flow rate of 20 m / s is required to move the air 20 kW, and the mixture of air and raw cotton 40 kW. At a speed of 30 m / s is required to move the air 50 kW, and the mixture of air and raw cotton 110 kW. Moreover, the power consumption is 50% and 46% of the total power consumption [12].

To determine the proportion of the power costs of air transportation and fuel mixture we use the formula:

$$\Delta N_H = (N_a - N_x) / (0.01N_a), \quad (8)$$

Analysis of relationship (8) at flow rates (20 - 30 m / s) is shown in Fig. 2, which show that during the pneumatic transport of seed cotton over half power setting to move the spent air.

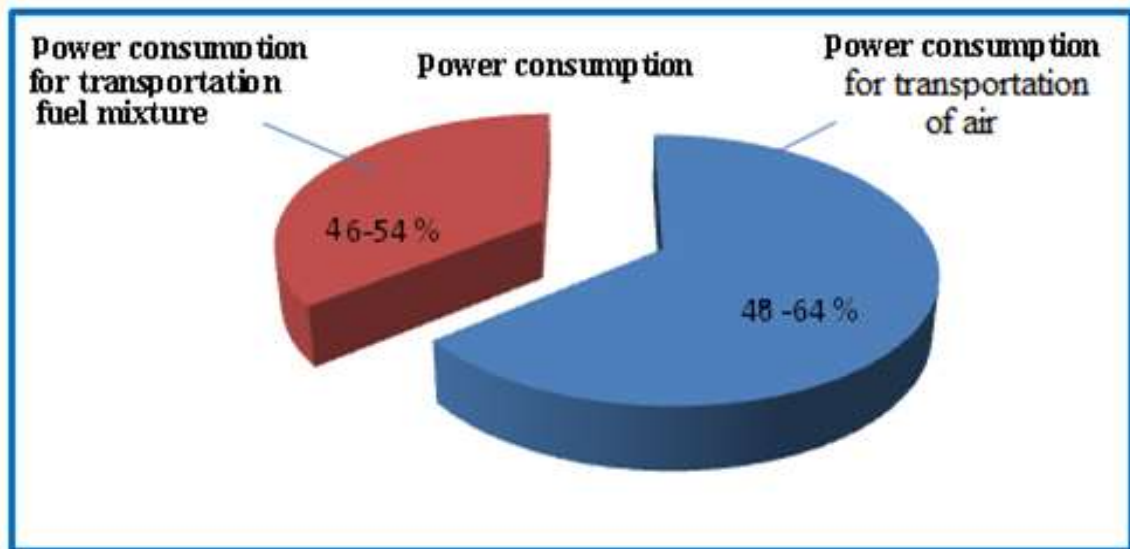

**Fig.2. Power consumption proportion of air transportation and fuel mixture**

At the same time, the share of power consumption for air transport at high flow rates is less than the lower, which is also obvious - to give the environment a large proportion of high speeds requires more effort than giving it a lower rate [13].

From the above we can conclude that the relationship (7) correctly describes the power consumption of the process of change of the flow parameters and the pneumatic installation as a whole and may be offered for use in the design of pneumatic conveying systems.

### Conclusions

1. Research has established that the aerodynamic force that contributes to the displacement of the medium through the pipeline pneumatic transport installation depends on the total pressure of the flow, ie, the sum of the dynamic and static pressures.
2. It was also found that the power expended in transporting the medium depends largely on the average flow rate, then the parameters from the (inner surface resistance, length

### References

- [1] X. T. Axmedxodjaev, D. A. Adashboyev, X. S. Yo'ldashev and S. S. To'xtaev, "INVESTIGATION OF FOREIGN LINT CLEANING SYSTEM," in *"Paxta to'qimachilik klasterlarida xomashyoni chuqur qayta ishlash asosida maxsulot ishlab chiqarish samaradorligini oshirishning iqtisodiy, innovatsion, texnologik muammolari va xalqaro tajriba"* xalqaro ilmiy konferensiya, Namangan, Uzbekistan, 2022.

- [2] X. T. Axmedxodjayev, A. A. Obidov and O. S. Sarimsakov, Paxta chigitlarini ishlov berishni samarali texnologiyasini yaratish, O. A., Ed., Namangan, Namangan: "Namangan" nashiryoti, 2020, pp. 70-80.
- [3] S. Gordon and Y.-L. Hsieh, Cotton: Science and technology., England: Woodhead Publishing Limited,, 2007, pp. 152-160.
- [4] I. D. Madumarov, O. X. Xoshimov, A. T. Qurbanov and X. S. Yo'ldashev, "STUDY OF CLEANING PROCESSING OF SEED COTTON IN FOREIGN," in *"Paxta to'qimachilik klasterlarida xomashyoni chuqur qayta ishlash asosida maxsulot ishlab chiqarish samaradorligini oshirishning iqtisodiy , innovatsion, texnologik muammolari va xalqaro tajriba"* xalqaro ilmiy konferensiya, Namangan, 2022.
- [5] S. R. Madumarov, Y. Y. Jurayev and K. S. Yuldashev, "GENERAL INFORMATION ON THE IMPORTANCE OF FEEDSTOCK DENSITY AND SPEED IN THE FIBER SEPARATION PROCESS," *ACADEMIC RESEARCH IN MODERN SCIENCE, International scientific-online conference*, vol. 8, no. 15, pp. 55-59, 20 October 2022.
- [6] Sarimsakov O. SH., Paxtani pnevmotransportga uzatish va xavo yordamida tashish jarayonini takomillashtirish, Namangan: "Namangan" nashiryoti, 2018, p. 40.
- [7] Sarimsakov O. SH., Paxtani uzatish va pnevmotransport yordamida tashish jarayonlarini nazariy asosalari, Namangan: "Usmon Nosir Media" nashiryoti, 2021, pp. 35-50.
- [8] O. S. Sarimsakov, D. M. Kurbanov, X. S. Yo'ldashev and Y. Y. Jurayev, "INVESTIGATION OF LOSING FIBER DURING CLEANING COTTON," in *Zamonaviy dunyoda amaliy fanlar: muammolar va yechimlar*, Uzbekistan, 2022.
- [9] I. Tursunov, X. S. Yuldashev and O. G. ' . Madiyarov, "ANALYSIS OF CHANGES IN AIR PARAMETERS IN A COTTON SEPARATOR," in *"Paxta to'qimachilik klasterlarida xomashyoni chuqur qayta ishlash asosida maxsulot ishlab chiqarish samaradorligini oshirishning iqtisodiy , innovatsion, texnologik muammolari va xalqaro tajriba"* xalqaro ilmiy konferensiya, Namangan, Uzbekistan, 2022.
- [10] Yo'ldashev X. S., "INVESTIGATING OF MOISTURE CONTENT IN STORING, DRYING AND CLEANING THE SEED COTTON," in *"Paxta to'qimachilik klasterlarida xomashyoni chuqur qayta ishlash asosida maxsulot ishlab chiqarish samaradorligini oshirishning iqtisodiy , innovatsion, texnologik muammolari va xalqaro tajriba"* xalqaro ilmiy konferensiya, Namangan, Uzbekistan, 2022.
- [11] X. S. Yo'ldashev, O. X. Xoshimov and B. B. O 'rinboyev, "STUDY OF CLEANING PROCESSING OF SEED COTTON,"

*Ijodkor O'qtuvchi*, vol. 5, no. 12, pp. 209-213, 13 10 2021.

- [12] K. S. Yuldashev, M. D. Inamova, M. A. Qobilov and A. A. Abduxaliqov, "Effect Of Moisture Continent In The Process Of Storing, Drying And Cleaning The Seed Cotton," in *SCIENCE, EDUCATION, INNOVATION IN THE MODERN WORLD*, USA, 2021.
- [13] K. S. Yuldashev, K. A. Abduraximov, M. D. Inamova and K. A. Mirgulshanov, "DEVELOPMENT OF THE DESIGN OF A FEEDER OF VIBRATION ACTION FOR SUPPLYING COTTON SEEDS TO LINTER MACHINES," in *SCIENCE, EDUCATION, INNOVATION IN THE MODERN WORLD*, USA, 2021.
- [14] Sarimsakov O. SH., *Aerodinamika va Pnevмотransport*, Namangan: "Namangan" Nashiryoti, 2021, pp. 98-116.
- [15] X. N. Sharipov, X. S. Yo'ldashev, Y. Y. Jurayev and Urinboyev B B., "RESEARCH OF LOSING FIBER CLEANER TECHNOLOGIES AND FOREIGN LINT CLEANER TECHNOLOGIES," in *Zamonaviy dunyoda amaliy fanlar: muammolar va yechimlar*, Uzbekistan, 2022.
- [16] A. Sulaymonov, M. Inamove and K. Yuldashev, "THEORETICAL STUDIES OF THE NATURE OF THE INTERACTION OF COTTON SEEDS IN THE GAP BETWEEN THE AGITATOR BLADE AND THE SAW CYLINDER," *EURASIAN JOURNAL OF ACADEMIC RESEARCH*, vol. 2, no. 11, pp. 666-672, 15 May 2022.
- [17]. Loytsyansky L. liquid and gas mechanics. Moscow, Drofa, 2003
- [18].E. V. Novikov. The study of air flow in the picker section of the unit als-1 and the device separating unrelated fires. *Textile industry technology*, no. 2 (314) 2009.
- [19]. Zarnitsyna E. G., Terekhova O. N. Ventilation systems and pneumatic transport. Publishing house of the Altai state technical University, Barnaul, 2011
- [20]. Muradov R., Sarimsakov O., S. Khusanov Interplant pnevмотransportnoe of raw cotton: state, problems and prospects. *Journal "problems of mechanics"*, 2014, №2.
- [21]. Garbaruk A., Strelets M., Shur M.. Simulation of turbulence in complex flows calculations. . Saint Petersburg Polytechnic University. Saint-Petersburg., 2012 [4].
- [22]. C. Antimonov, etc. Measurement and calculation of pressure losses in air ducts. Orenburg State University. Orenburg., 2005.
- [23]. Muradov R.. Bases of increase of efficiency of the device for pneumatic transportation of cotton. Monograph. Namangan, 2015.
- [24]. Sarimsakov O. The Change in Air Pressure Along the Length of the Pipeline Installation for Pneumatic Conveying of Raw Cotton. USA. *Journal Engineering and Technology*. 2016; 3(5): 89-92

[25]. Sarimsakov O., Khusanov, S. Abdullaev SH., “Study of motion of air inside duct” of the Namangan engineering-technological Institute. Materials of the Republican scientific-practical conference. Namangan, 2015.

[26]. Sarimsakov O., Khusanov S. Abdullayev SH., “The Control parameters of the air flow in pneumatic conveying installation Namangan engineering-technological Institute. Materials of the Republican scientific-practical conference. Namangan, 2015.

[27]. Sarimsakov O., A.Sidikov, N.Karimov, B.Abdusattarov. The Study of Law of Distribution by Pipe Length and Transparency on Transportation of Cotton with Pneumatic Transport Psychology and education (2021) 58(2): 291-295 an interdisciplinary journal (Scopus)

[28]. Sarimsakov O., Turgunov D. Theoretical Fundamentals of Cotton Transportation to Pnevмотransport Equipment// Internationale journal of Human Computing technology// Vol. 3 No. 2(2021): IJHCS 27 APRIL 2021

[29]. Sarimsakov O., Isaev Sh., Sultanov O., Goybnazarov E. // Theoretical Features of the Process Cleaning Zone between Sections of Raw Cotton from Weed Impurities Engineering, 2020, 12, 739-747 (Web of Science), <https://www.scirp.org/journal/eng>

[30]. Sarimsakov O Sattorov N. Siddiqov Z. Xusanova Sh.// Improvement of the Process in Disassembling of Cotton Stack and Transferring the Cotton into Pneumotransport// International Journal of Advanced Science and Technology Vol. 29, No. 7, (2020), pp. 10849-10857 (Scopus)

[31]. Sarimsakov O., I.Tursunov, N. Rajapova, B. Mardonov // The study of the movement of the aero mixture through the pipeline during pneumatic transportation //Journal of Advanced Research in Dynamical and Control Systems. Vol.12,04-special issue, 2020. P.1287-1297.